



भारतीय अन्तर्देशीय जलमार्ग प्राधिकरण

(पत्तन, पोत परिवहन और जलमार्ग मंत्रालय, भारत सरकार)


INLAND WATERWAYS AUTHORITY OF INDIA

(Ministry of Ports, Shipping and Waterways, Govt. of India)

क्षेत्रीय कार्यालय : पी-७८, गार्डनरीच रोड, कोलकाता - ७०० ०४३ (प० बं०)

REGIONAL OFFICE : P-78, Garden Reach Road, Kolkata - 700 043 (W.B.)

दूरभाष : 2439 0393 / 5577 / 6055, फैक्स : 2439 5570

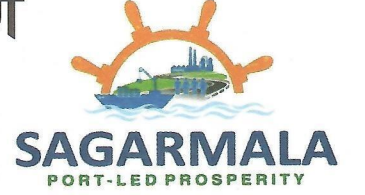

E-mail : iwai@nic.in
dirkol.iwai@nic.in

IWAI/KOL/8/Terminal/Haldia/2024-25

Date:-22-10-2024


NOTICE FOR INVITING QUOTATION

Sealed quotations are invited from reputed and experienced contractors for the work of "Construction of RCC platform for Gangway at 3rd no. jetty of Haldia" as per the annexure enclosed herewith on the following terms and conditions.

TERMS & CONDITIONS

1. The price may be quoted including all the costs such as labour, taxes, materials, transportation etc except GST.
2. The work shall be completed at, Old Haldia Terminal within 10(Ten) days from the date of receipt of the work order & as per direction of E.I.C or his representative..
3. 90% payment shall be released by RTGS/NEFT/PFMS after submission of bill and duly certification of the bill by the officer concerned after deduction of the statutory dues if any. Balance 10% will be released after completion of guarantee obligation period of 6 month on duly certification of the officer concerned.
4. In case of delay in completion of works, liquidated damage @1.5% per two days subject to a maximum of 10% will be charged.
5. The firm should also require submitting self certified copy of PAN Card, Registration certificate, GST, and credential certificate etc.

The sealed quotations should be reach to IWAI, Kolkata office latest by on or before 28-10-2024 at 1100 hrs. The sealed bids will be opened on same at 1130 hrs.



(R.K.Singh)

DIRECTOR

Copy to:-

- 1) Notice Board, IWAI, Kolkata
- 2) SMPK
- 3) IWTD, Govt. of West Bengal

Head Office : Jalmarg Bhawan, A-13, Sector-1, NOIDA - 201 301 (U.P.)

Phone : +91-120-2544036, 2543972, 2527667, 2448101, Fax : +91-120-244009, 2544041, 2521764, 2543973

Website : www.iwai.gov.in / www.iwai.nic.in Email : iwainoi@nic.in

Bill of quantity for construction of RCC platform for Gangway at 3rd no. jetty of Haldia					
S. no.	Description of item	unit	Qty	Rate (in Rs.)	Amount (in Rs.)
1	Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-charge	cum	7.50	422.80	3171.00
2	Providing & laying local sand in f/t all complete as per specification & direction of EIC	cum	0.19	1799.79	337.46
3	Providing & laying brick flat soling in f/t all complete as per specification & direction of EIC	nos	83.00	18.00	1494.00
4	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources)	cum	0.38	6679.69	2504.88
5	Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level 1:1.5:3 (1 cement : 1.5 coarse sand (zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size derived from natural sources)	cum	3.06	7665.89	23470.11
6	Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts etc. above plinth level up to floor five level, excluding cost of centering, shuttering, finishing and reinforcement : 1:1.5:3 (1 cement : 1.5 coarse sand(zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size derived from natural sources)	cum	1.97	8632.14	16968.95
7	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete	kg	592	91.40	54106.81
8	Providing centring & shuttering all complete	sqm			
	In Pedastal		5.04	332.33	1674.94
	In Column (Upto GL)		5.09	814.66	4146.65
	In Capping beam/Tie beam		4.55	624.07	2839.52
	In colum upto slab/platform		6.36	814.66	5183.31
	In slab/Platform		6.00	785.81	4714.86
9	Providing 12mm thick MS plate over slab/platform all complete as per specification & direction of EIC	kg	236	150.00	35325.00
10	Providing 10mm thick MS plate in the middle of slab/platform all complete as per specification & direction of EIC	kg	6.28	150.00	942.00
11	Supply & Grouting of M52 bolts of 300mm length along with 2 nos of nuts in each bolts all complete as per specification & direction of EIC	kg	32.33	150.00	4849.80
Total excluding GST					161729
Percentage rate (-/+)					
Grand Total					